



60 Series Premium Pocket Testers

pH, ORP, Conductivity/TDS/Salinity, Temp.



Durable design:
IP67 Waterproof
& Dustproof



Easy-to-install
Replaceable Probes



Powered by AAA batteries,
up to 2000 hours of
operation time


Display Features



Measurement
Mode

Calibration
Mode

Heads-Up
Mode

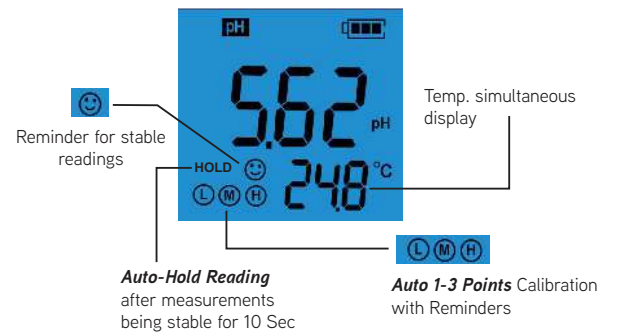

Probe Features

6 Models for your
choice



PH60
(Glass Bulb)

General water solution
pH Test

PH60F
(Flat Glass)

Surface and
micro-volume pH
Test

PH60S
(Spear Glass)

Solid/Semi-Solid
pH Test

ORP60
(Platinum)

ORP Test

EC60
(Platinum Black)

Conductivity/TDS/
Salinity Test

PC60
(Glass Bulb &
Platinum Black)

pH/Cond./TDS/
Salinity Test

Applications



Test anywhere



Micro-Volume
pH Test



Skin pH Test



Food pH Test

60 Series ■ Premium Pocket Testers



	PH60	PH60F	PH60S
pH	Measuring Range	-2.00 to 16.00 pH	
	Resolution/Accuracy	0.01pH / ±0.01 pH	
	Calibration	1 to 3 points Auto Calibration	
ORP	Measuring Range	±1000 mV	
	Resolution/Accuracy	1 mV / ±0.2% F.S	
Temp.	Measuring Range	0 to 50.0 °C (32 to 122°F)	
	Temp. Compensation	Automatic 0 to 50.0 °C (32 to 122°F)	
Others	Heads-Up Function	Yes	
	Self-Diagnosis	Yes	
	Low-Battery Warning	Yes	
	IP Rating	IP67 Waterproof and Dustproof, Floatable	
	Power Supply	DC3V AAA batteries x4; Continuous working > 2000 hours	
	Sensor Model	PH60-E	PH60F-E
Application	General water solution's pH	Flat surface pH (fabrics, skin, paper) and micro-volume water solution's pH	Solid/Semi-Solid food samples (cheese, meat, fruit, sushi rice...) and soil's pH
Compatible Probes	PH60-E, PH60F-E, PH60S-E, ORP60-E		





	PC60	EC60	ORP60	
pH	Measuring Range	-2.00 to 16.00 pH	/	
	Resolution/Accuracy	0.01 pH / ±0.01 pH	/	
	Calibration	1 to 3 Points Auto Calibration	/	
ORP	Measuring Range	/	±1000 mV	
	Resolution/Accuracy	/	1 mV / ±0.2% F.S	
Cond.	Measuring Range	0-200.0 μS/cm, 0-2000 μS/cm, 0-20.00 mS/cm	0-200.0 μS/cm, 0-2000 μS/cm, 0-20.00 mS/cm	
	Resolution/Accuracy	0.1/1 μS, 0.01 mS / ±1% F.S	0.1/1 μS, 0.01 mS / ±1% F.S	
	Calibration	1 to 3 Points Auto Calibration	1 to 3 Points Auto Calibration	
	Temp. Coefficient Setting	0.00 to 4.00%/°C	0.00 to 4.00%/°C	
TDS.	Measuring Range	0.0 ppm to 10.00 ppt	0.0 ppm to 10.00 ppt	
	TDS. Factor Setting	0.4 to 1.0	0.4 to 1.0	
Salinity	Measuring Range	0 to 10.00 ppt	0 to 10.00 ppt	
Temp.	Measuring Range	0 to 50.0 °C (32 to 122°F)		
Others	Temp. Compensation	Yes		
	Heads-Up Function	No	Yes	
	Self-Diagnosis	Yes		
	Low-Battery Warning	Yes		
	IP Rating	IP67 Waterproof and Dustproof		
	Power Supply	DC3V AAA batteries x4; Continuous working > 1000 hours	DC3V AAA batteries x4; Continuous working > 1000 hours	DC3V AAA batteries x4; Continuous working > 2000 hours
	Sensor Model	PC60-E	EC60-E	ORP60-E
Compatible Probes	PH60-E, PH60F-E, PH60S-E, PC60-E, EC60-E	EC60-E	ORP60-E	